Simplicity®

OWNER'S MANUAL

36" LAWN ROLLER

MFG. NO. 227

SIMPLICITY MANUFACTURING COMPANY, INC.

REF. FORM - OF17

TP 1243

Mfg. No. 227 for use with Broadmoor, Yeoman and Serf.

ASSEMBLY

1. Place a 3/4 in. washer over each roller axle up against the roller and slide the nylon bushings on.

2. Place the frame on the axle over the bushings and install the outer 3/4 in washers and cotter pins.

3. Bolt the tongue to the frame as shown.

4. Mount the scraper bar to the frame with the pins and spring clips. The scraper arms fit between the two frame sidebars.

5. Insert the spring holding pins through the frame axle saddles and secure with the remaining spring clips. Hook the spring ends through the holes in the pin and the scraper. Attach the roller tongue to the tractor hitch with the remaining pin and spring clip.

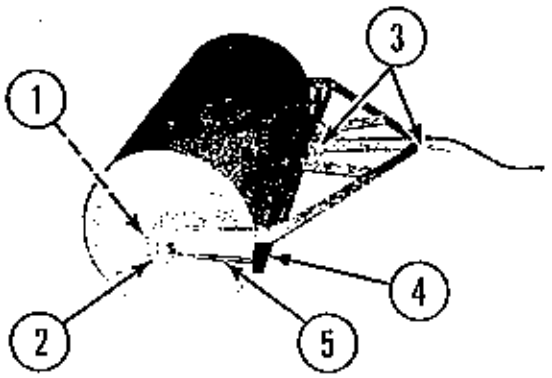

OPERATION

The lawn roller holds approximately 40 gallons of water and weighs about 370 pounds when full. The weight is easily adjusted by the amount of water used. NEVER LEAVE THE ROLLER FILLED WITH WATER WHERE IT MAY FREEZE. Occasionally place a few drops of oil on the roller bushings and pivot points.

MFR'S. NO. 227 LAWN ROLLER SPECIFICATIONS

ROLLER	MATERIAL: 12 Gauge Steel
	WIDTH: 36 Inches
	DIAMETER: 18 Inches
	WATER CAPACITY: 40.2 Gallons
	WEIGHT (Full) 430 Lbs.
DIMENSIONS	LENGTH: 51 Inches
	HEIGHT: 18 Inches
	WIDTH: 44 Inches
	SHIPPING WEIGHT: 108 Lbs.

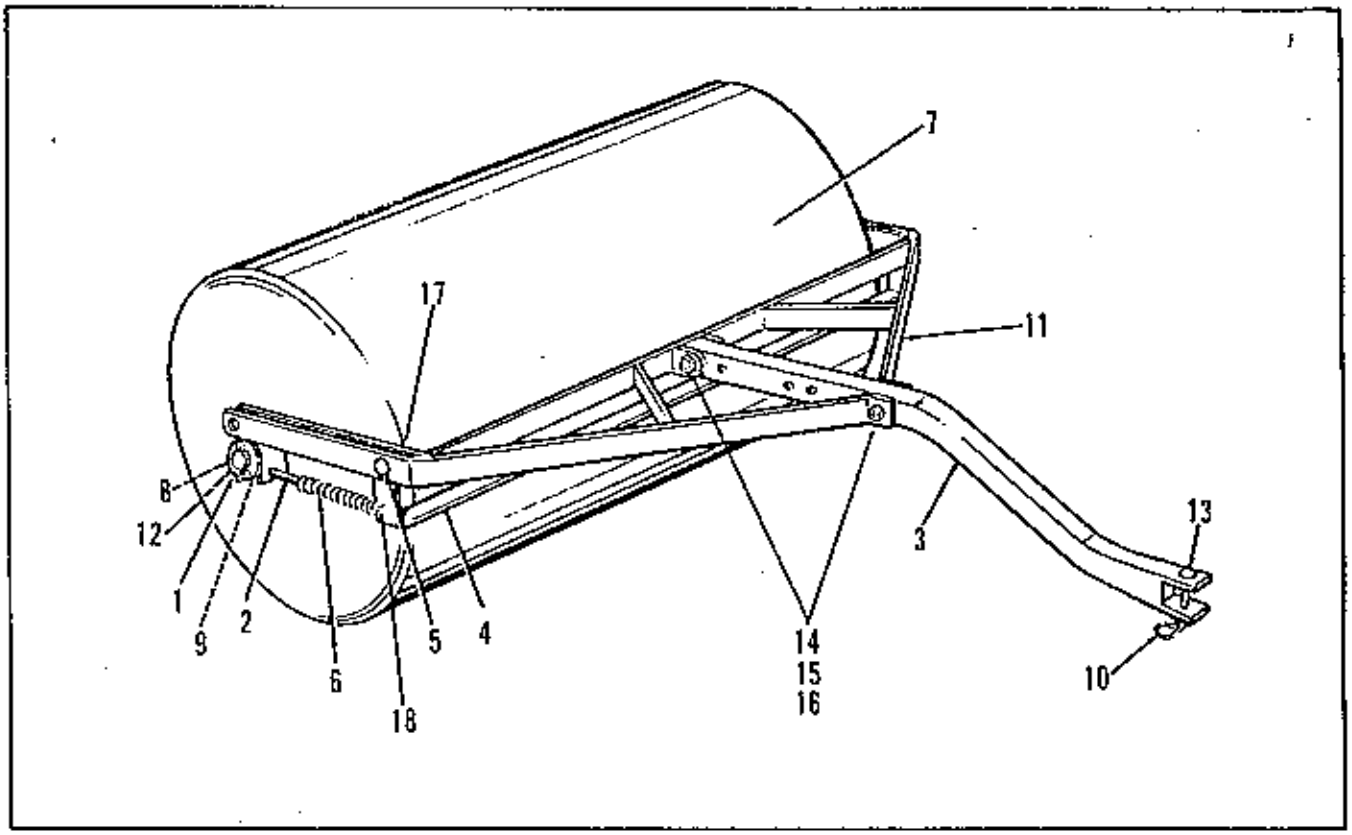

Ref No.	Part No.	Qty. Req.	Description
1	719005	4	Plain Washer, 3/4"
2	102043	2	Extension Pin
3	102037	1	Tongue Assembly
4	102068	1	Scraper
5	102004	2	Pivot Pin
6	8011158	2	Spring
7	102069	1	Roller
8	102034	2	Bushing
9	102007	2	Bearing Retainer
10	8161045	3	Spring Clip
11	102065	1	Frame Assembly
12	722002	2	Cotter Pin, 3/32" x 1" lg.
13	118053	1	Pin
14	705003	2	Hex Capscrew, 3/8"-16 x 2-1/4" lg.
15	720002	2	Lock Washer, 3/8"-16
16	717003	2	Hex Nut, Full, 3/8"-16
17	722016	2	Cotter Pin, 3/32" x 5/8" lg.
18	722004	2	Cotter Pin, 1/8" x 1/2" lg.